
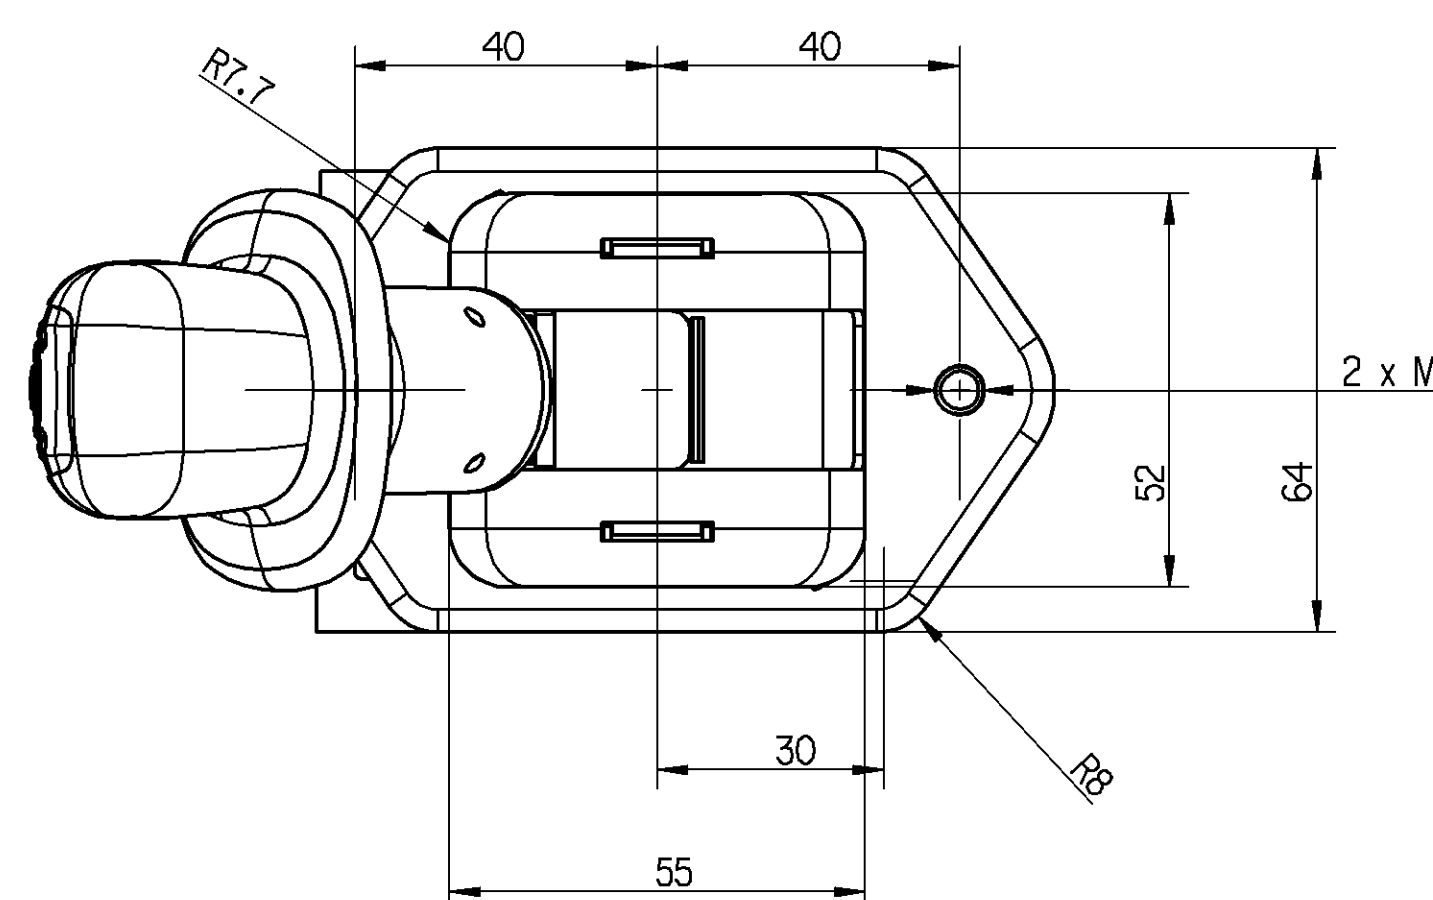


Non è permesso copiare o riprodurre questo documento, né utilizzare il contenuto o i dati contenuti in esso, senza permesso scritto dalla WABCO. Toute réimpression ou utilisation non autorisée sans la permission écrite de la WABCO est formellement interdite. Toute réimpression ou utilisation non autorisée sans la permission écrite de la WABCO est formellement interdite. Any unauthorized copying or reuse of this document is strictly prohibited. Any unauthorized copying or reuse of this document is strictly prohibited. Any unauthorized copying or reuse of this document is strictly prohibited.

	MATERIAL MATIERE	SURFACE PROTECTION PROTECTION DE SURFACE	COLOR COULEUR
I	JED 004M	JED 260	
II	JED 326		
III	ABS TN		BLACK / NOIR
IV	PVC		BLACK / NOIR
V	JED 029M3	JED 259	
VI	JED 679.0	JED 256	
VII	JED 051 M2	JED 257	
VIII	Z CNF 13-09		

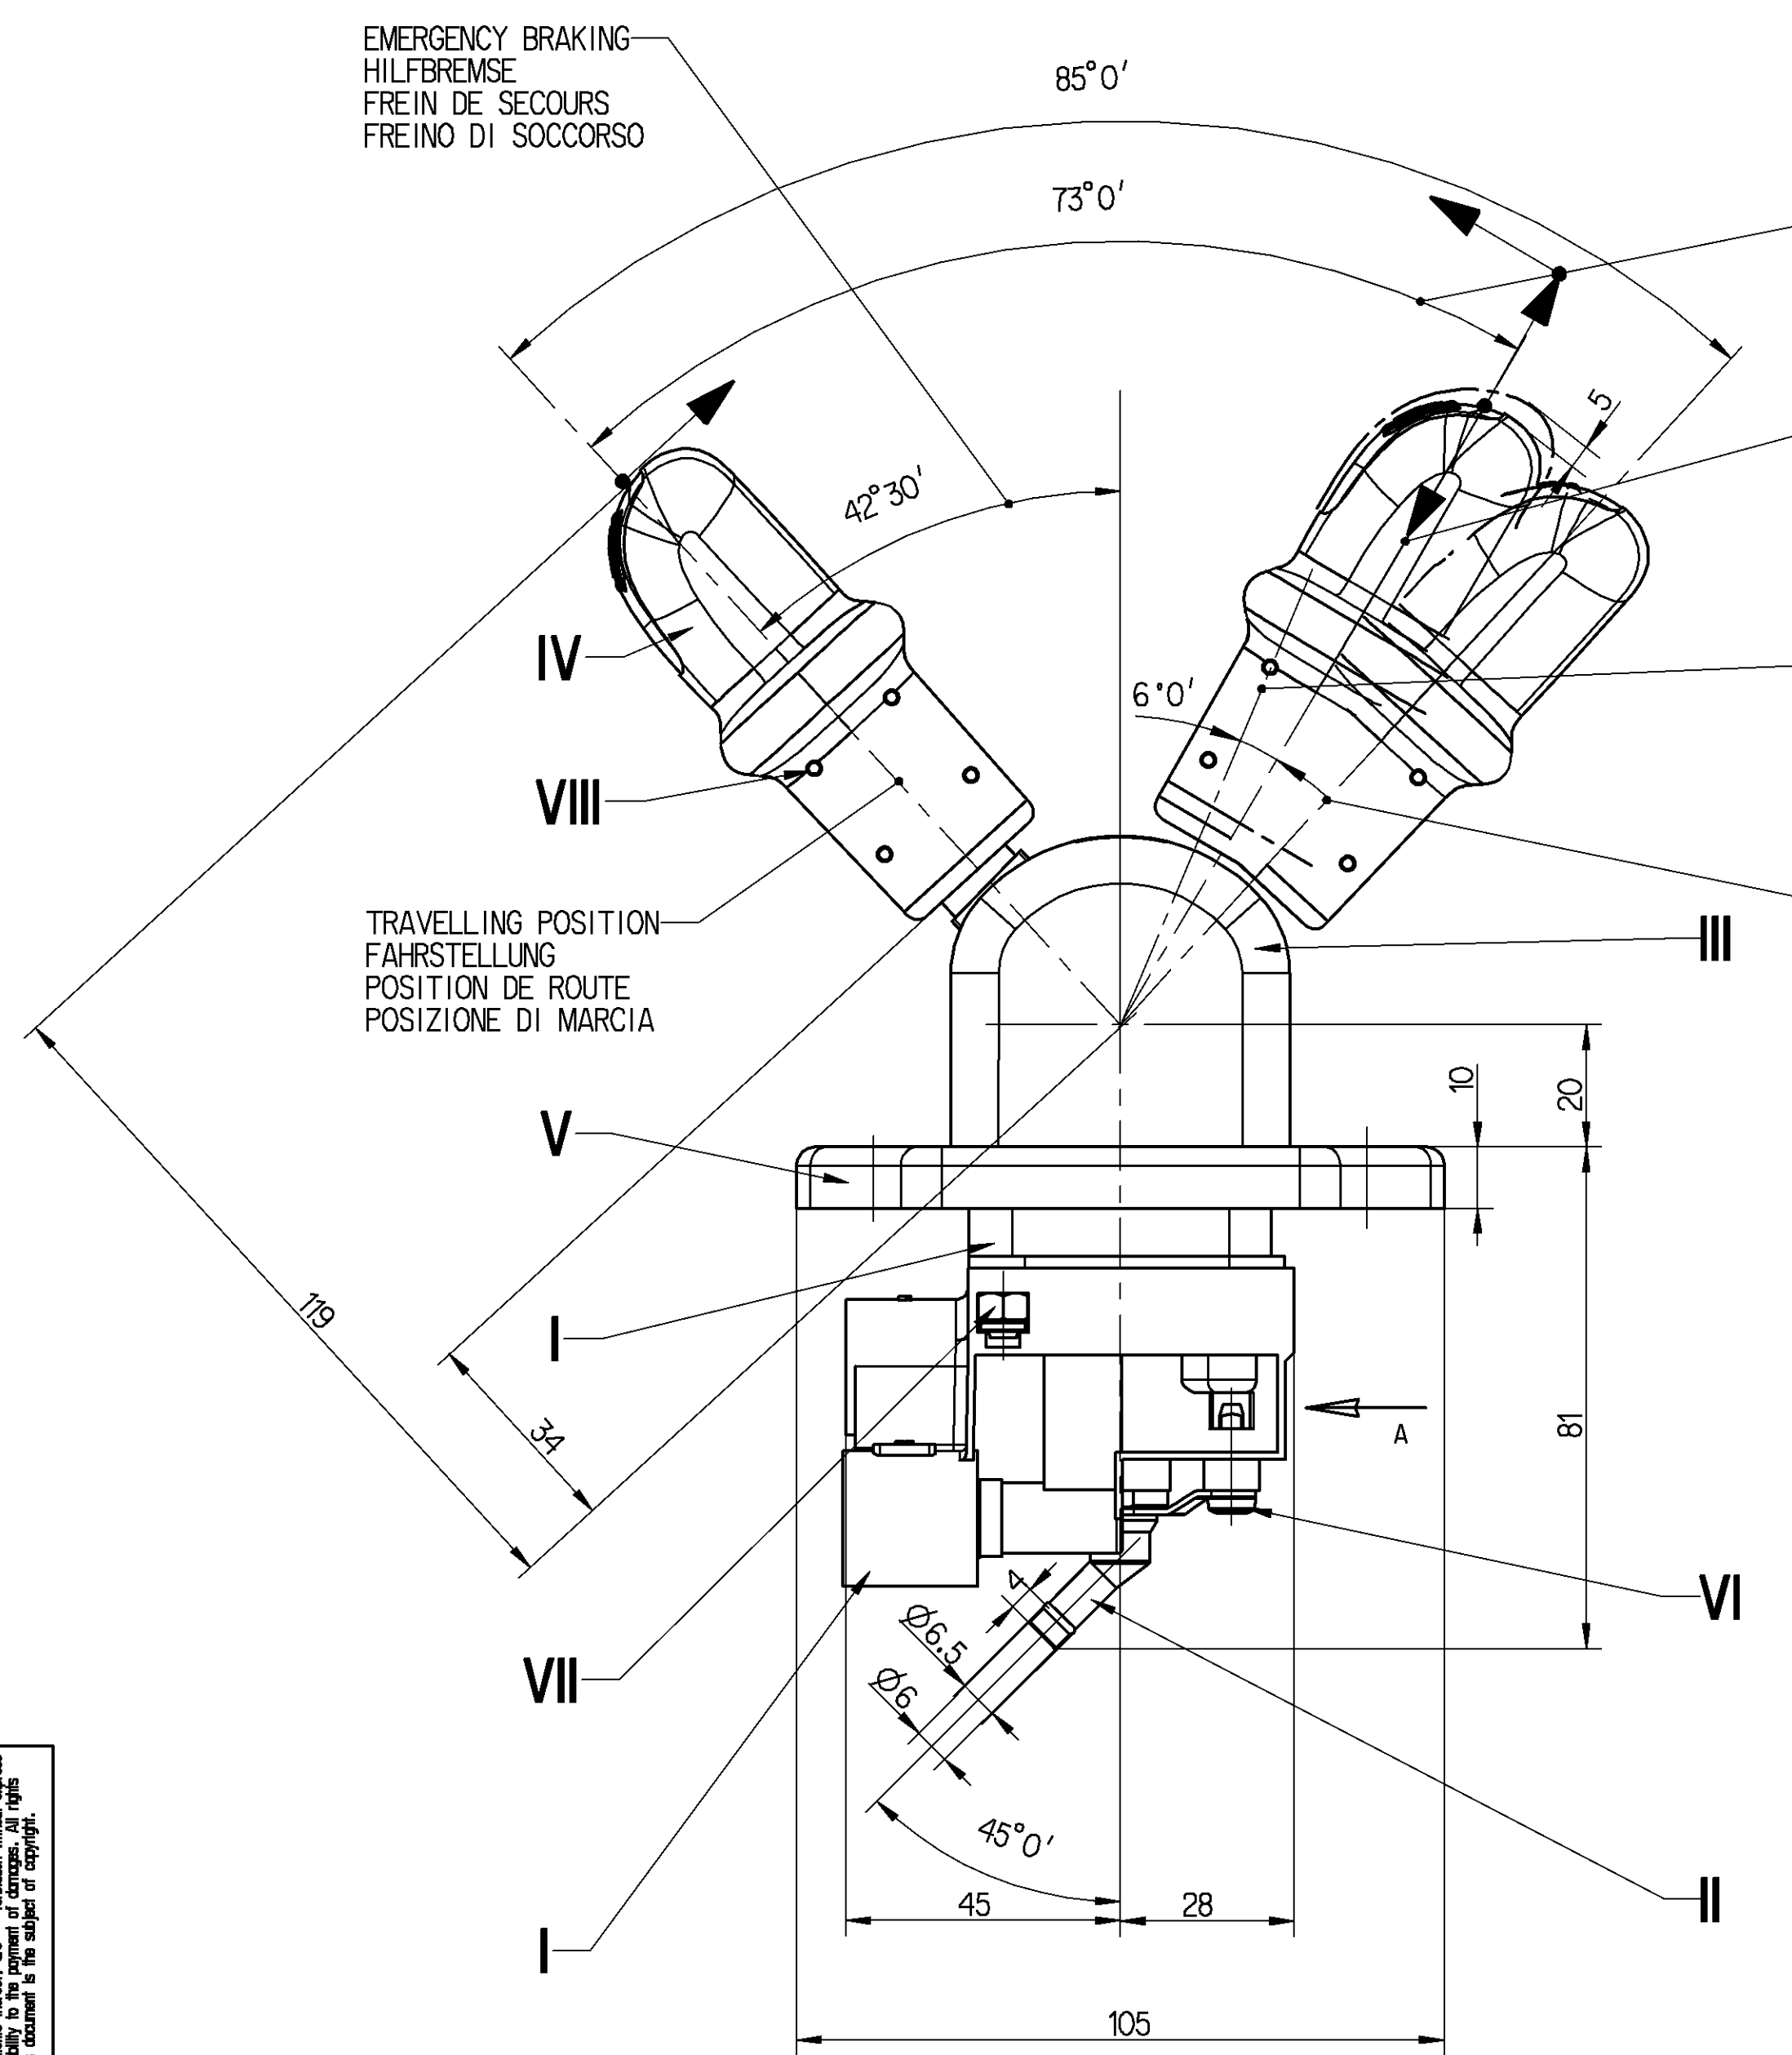

<1> THE LOCKING DEVICE MUST AUTOMATICLY AND SAFETY LOCK THE HANDLE IN THE PARKING POSITION
LA BUTEE DOIT VERROUILLER AUTOMATIQUEMENT ET DE FACON SECURISEE LA POIGNEE EN POSITION PARKING


AUTOMATIC RETURN
AUTOMATISHER RUECKLAUF
RETOUR AUTOMATIQUE
RITORNO AUTOMATICO

PARKING POSITION ; LOCKED POSITION
RASTSTELLUNG ; VERRIEGELTE STELLUNG
POSITION PARKING ; POSITION VERROUILLEE
POSIZIONE DI STAZONAMENTO ; POSIZIONE BLOCARE

FIRST POINT PRESSURE
DRUCKPUNKT
POINT DUR
PUNTO DI RESISTENZA

TEST POSITION
PRUEFUNGSTELLUNG
POSITION TEST
POSIZIONE TEST

3xM16x1.5
JED 464
TORQUE
ANZUGSMOMENT
COUPLE DE SERRAGE 34Nm MAX.
COPPIA DI SERRAGGIO



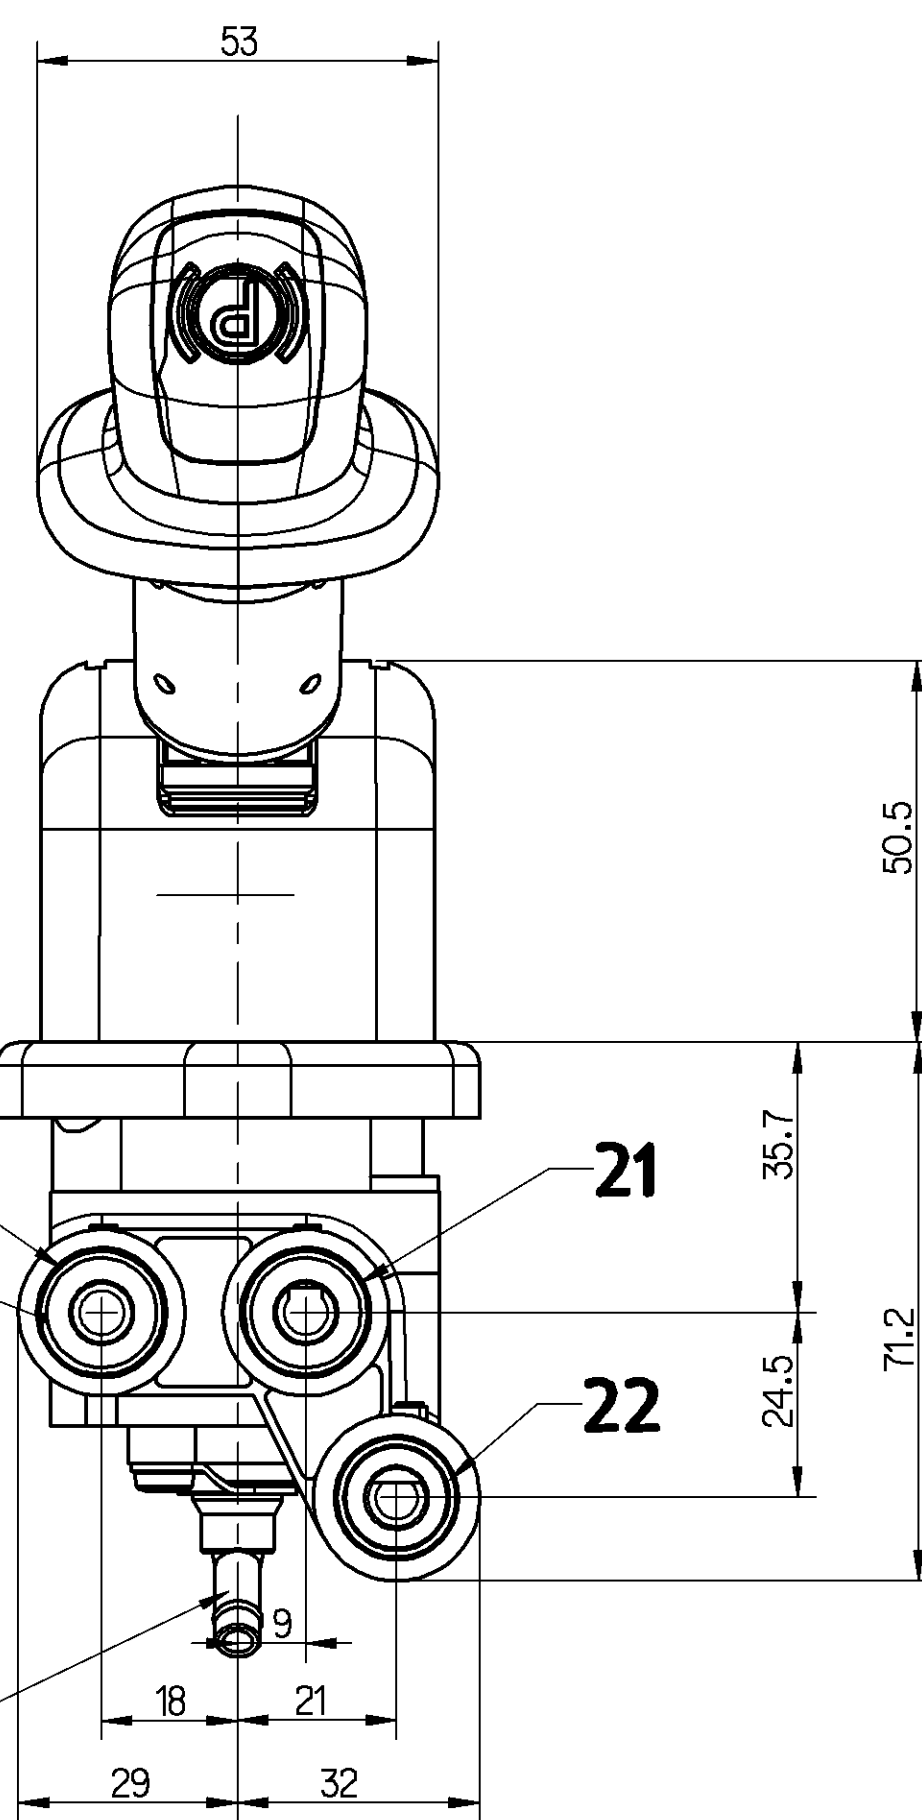


VIEW A
VUE A

REFERENCE CLIENT : 74 20813850
CUSTOMER REFERENCE

TORQUE
ANZUGSMOMENT
COUPLE DE SERRAGE 4Nm MAX.
COPPIA DI SERRAGGIO

SUPPLY VORRAT ALIMENTATION ALIMENTAZIONE	1	
SPRING BRAKE CYLINDER FEDERSPREICHERZYLINDER CYLINDRE A RESSORT CILINDRO A MOLLA	21	MEDIUM : AIR MEDIUM : LUFT FLUIDE : AIR FLUIDO : ARIA
TRAILER CONTROL VALVE ANHAENGER STEURVENTIL VALVE DE CONTROLE DE REMORQUE VALVOLA DI CONTROLLO DI REMORCHIO	22	THERMICAL RANGE THERMISCHER ANWENDUNGSBEREICH TEMPERATURE DE FONCTIONNEMENT -40°.....+80°C TEMPERATURA DI UTILIZZAZIONE
EXHAUST ENTLUEFTLUNG ECHAPPEMENT SCARICO	3	SUPPLY PRESSURE VORRATSDRUCK PRESSION PNEUMATIQUE D'ALIMENTATION : P1=10 BAR MAX. PRESSIONE PNEUMATICA DI ALIMENTAZIONE

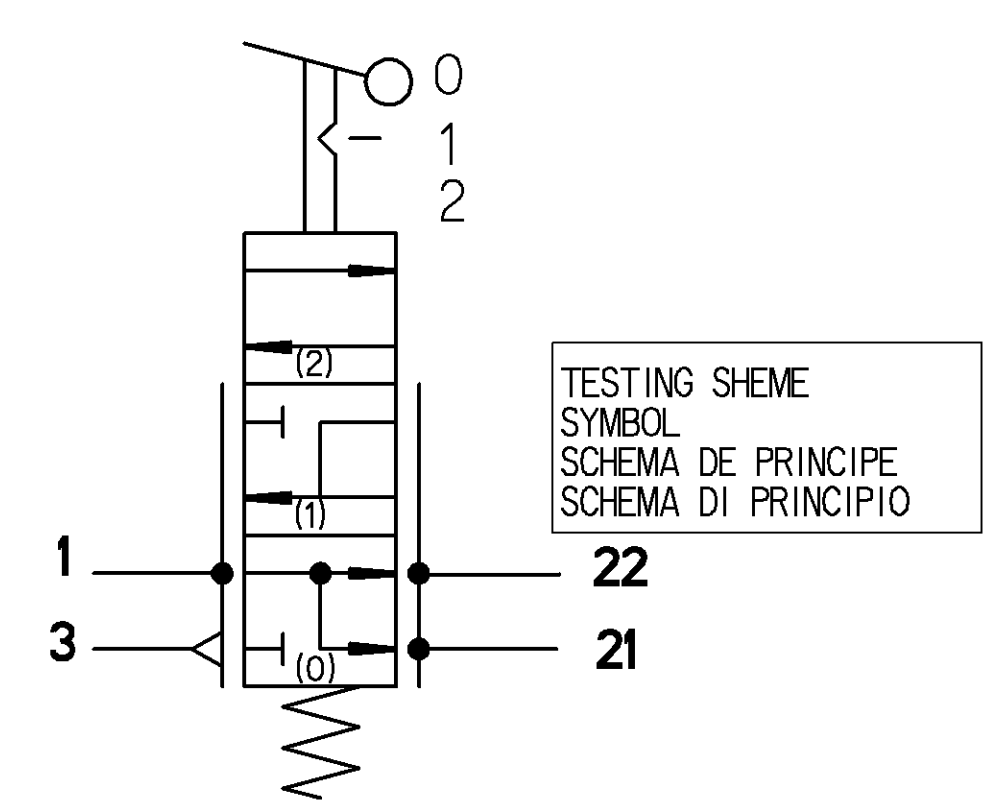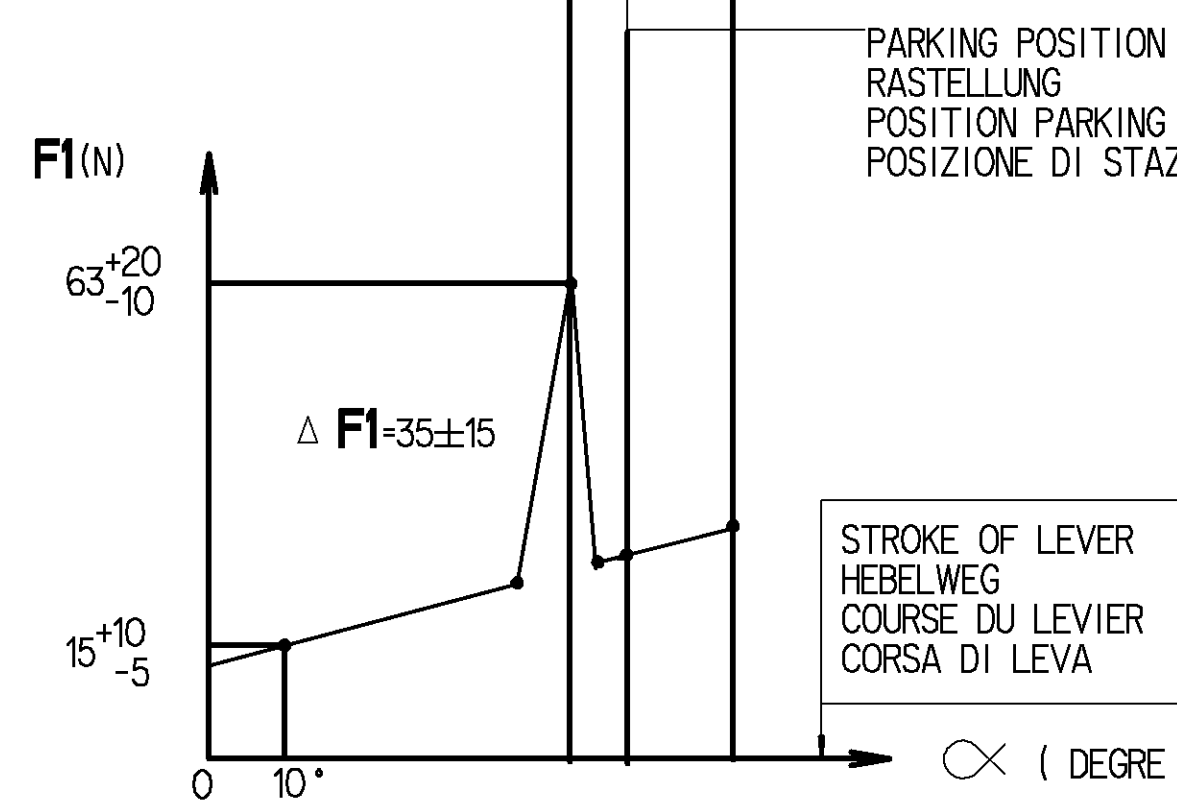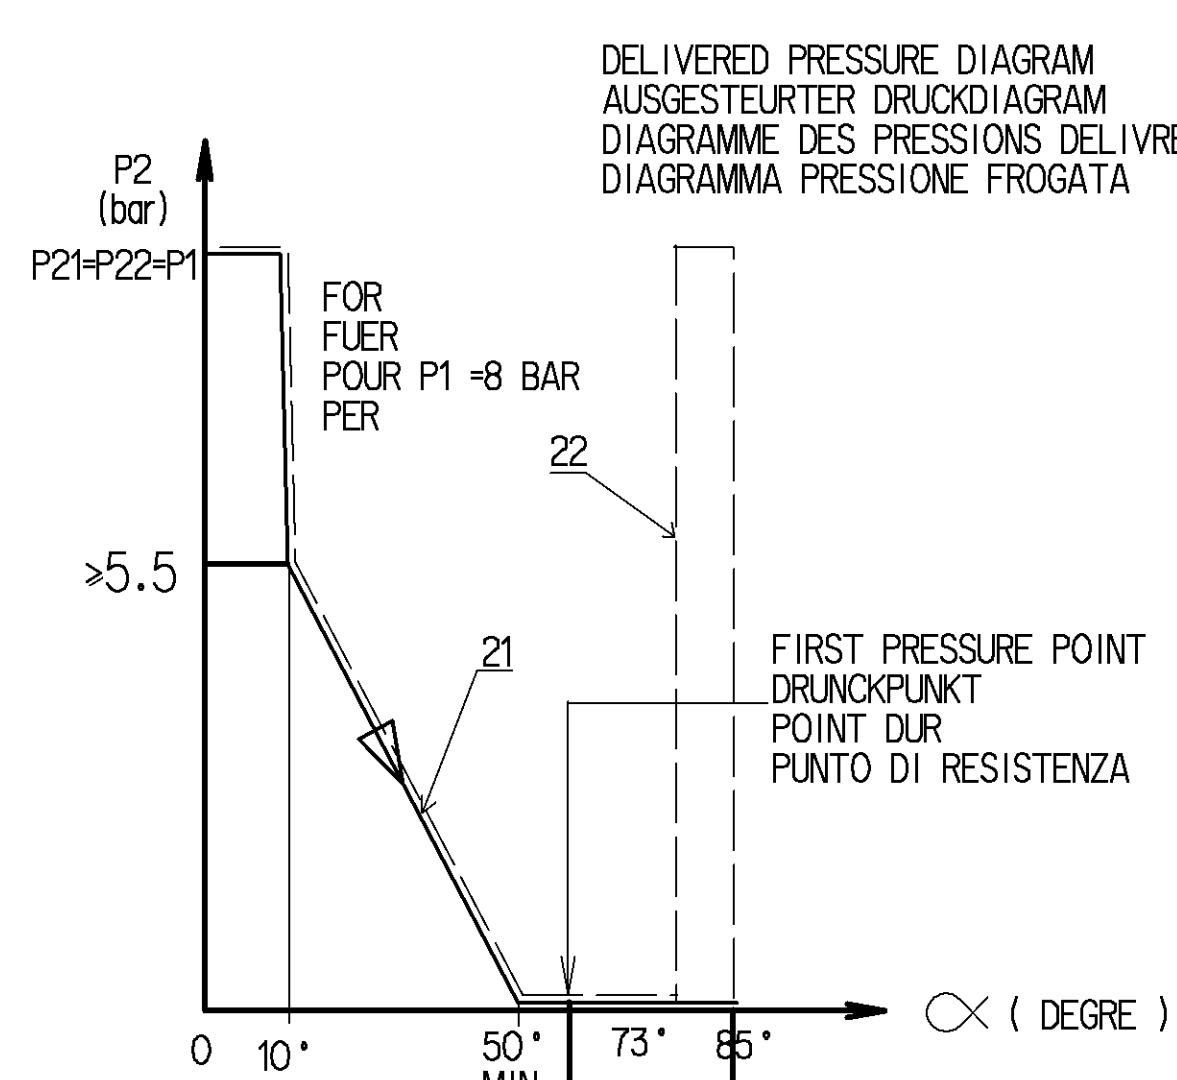

SPECIAL CHARACTERISTICS
2x< > -
CARACTERISTIQUES SPECIALES
-

General Specification: JED-334-0		Copyright WABCO		Doc. Code		Language		Sheet	
Further Technical Data		Date		Signature		Date		Signature	
Doc. Code		Sheet		To		Checked		Barbeau	
General Tolerances JED-261		Range of Nominal Dimensions (± mm)		Class		1)		±3°	
Fine		0.5		1.0		1.5		2.0	
Medium		1.0		2.0		3.0		4.0	
Coarse		2.0		3.5		5.0		6.5	
Tapped Holes acc.		1)		Tolerance Class Applied Crossmarked		A 1		530	
Product Identification No.		961 723 140 0		Function Code		CAD System		Prod. Type	
0.83 kg		1:1		Pro/E		OO X		Replacement for	
Size		TRI		Pro/E		OO X		Replacement for	